


date sheet			riding sport				
19/4/09 9:35			CROSS				
name rider			model bike				
PINCO PALLINO			CRF 250 2006				
weight rider			type valve				
70			COMP SHOCK				
SET THE ORIGINAL STACK			SET THE MODIFIED STACK				
Spring N/mm	report Comp/LOW Speed	Charge Low speed N/mm	Spring N/mm	report Comp/LOW Speed	Charge Low speed N/mm		
53	4,63%	8,73	53	3,28%	6,18		
Shim Base Bottom		Inflection Max Low Speed	Shim Base Bottom		Inflection Max Low Speed		
22	0,0	0,30	23	0,0	0,30		
Ø Outer Diameter	H Thickness	Shims Number	Ø Outer Diameter	H Thickness	Shims Number		
44	0,20	7	44	0,20	7		
44	0,15	9	44	0,15	9		
1° Shim break	37	0,15	1	1° Shim break	37	0,15	1
Base Bottom Shim break	30	0,15	1	Base Bottom Shim break	28	0,15	1
	42	0,20	2		42	0,20	2
	40	0,25	1		40	0,25	1
	38	0,25	1		38	0,25	1
	36	0,25	1		36	0,25	1
	34	0,25	1		34	0,25	1
	32	0,25	1		32	0,25	1
	30	0,25	1		30	0,25	1
	29	0,30	1		29	0,30	1
	28	0,30	1		28	0,30	1
	27	0,30	1		27	0,30	1
	26	0,30	1		26	0,30	1
	25	0,30	1		25	0,30	1
	24	0,30	1		24	0,30	1
	23	0,30	1		23	0,30	1
	0	0,00	0		0	0,00	0
	0	0,00	0		0	0,00	0



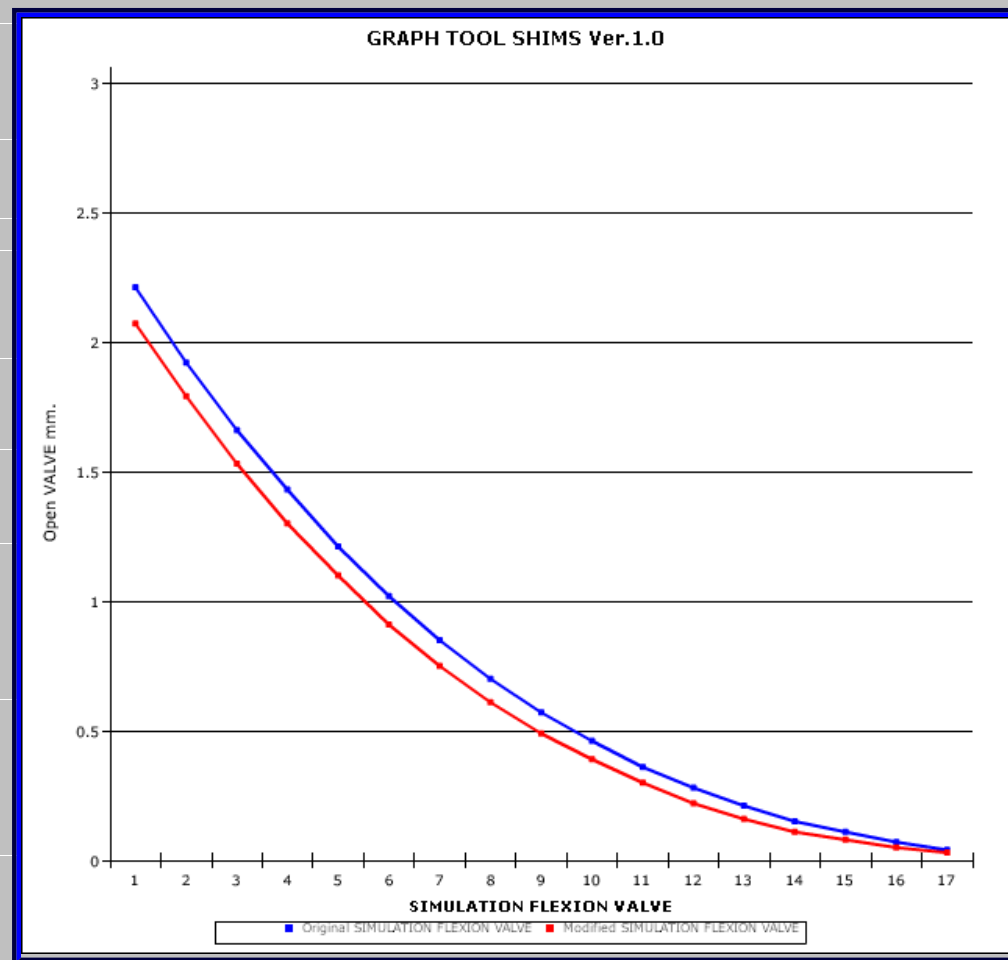

SCARAMAL LORENZO
 VIA VIVALDI 7
 15060 - BASALUZZO (AL)
 CELL. 335 6480248
info@motocross1.com

19/4/09 9:35 AM

Standard Valve Specification Sheet rider: Name rider: PINCO PALLINO

Bike model : CRF 250 2006 Riding sport: CROSS

COMP SHOCK	ORIGINAL			MODIFIED			NOTES
	Ø Outer Dia	Thickness	Shims N°	Ø Outer Dia	Thickness	Shims N°	
Valve Spec.	44	0,20	7	44	0,20	7	
	44	0,15	9	44	0,15	9	
	37	0,15	1	37	0,15	1	
	30	0,15	1	28	0,15	1	
	42	0,20	2	42	0,20	2	
	40	0,25	1	40	0,25	1	
	38	0,25	1	38	0,25	1	
	36	0,25	1	36	0,25	1	
	34	0,25	1	34	0,25	1	
	32	0,25	1	32	0,25	1	
	30	0,25	1	30	0,25	1	
	29	0,30	1	29	0,30	1	
	28	0,30	1	28	0,30	1	
	27	0,30	1	27	0,30	1	
	26	0,30	1	26	0,30	1	
	25	0,30	1	25	0,30	1	
	24	0,30	1	24	0,30	1	
	23	0,30	1	0	0,00	0	
	0	0,00	0	0	0,00	0	
	0	0,00	0	0	0,00	0	
	22	base		23	base		
Non return spring							
Sag rider (pre-load)							
Slide Collar Ø 8							
Slide Collar Ø 6							
Screw Adjust. COMP.							
Screw Adjust. REB.							
Pressure PSI							
Oil Level							
type oil							
Charge LOW speed N/mm.		8,73			6,18		
Report Comp/LOW Speed		4,63%			3,28%		
Spring N/mm.		53,00			53,00		
Remarks							